


INTRODUCTION

LUXroll uses a 3M adhesive which is designed to have optimal strength, reliability, and thermal performance. It forms a strong bond with a variety of fixture materials including powder coated and painted metals.

90 DEGREE PEELING ADHESION

The peak force was measured by pulling perpendicularly from the poke-in connector at the end of the applied product. Elevated temperature was reached by powering the product at 25W/ft.

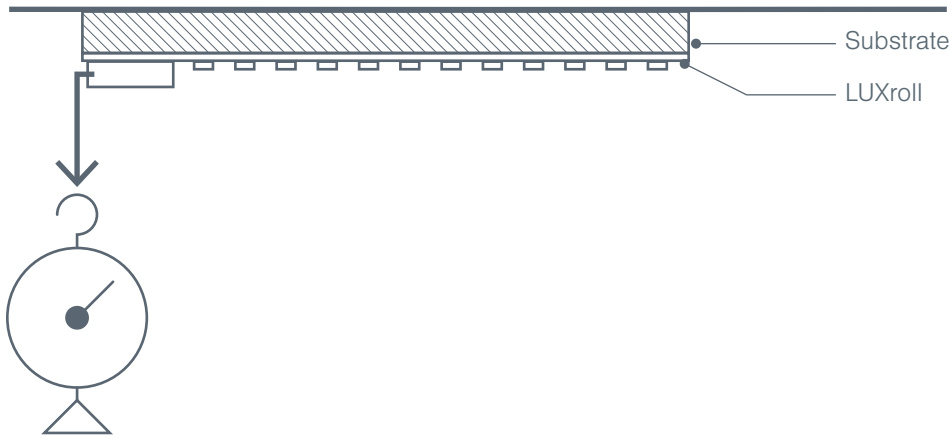

TEST RESULTS

Substrate	Peel Force (lbf/20mm) 25C	Peel Force (lbf/20mm) 85C
Wood	7	3
Aluminum	6	5
Powder Coat Aluminum	6	5
Steel	10	5
Powder Coat Steel	6	4

CONTACT US

For assistance, please reach out at
sales@luxtech.com